



*Carrie Eklund
Central Services Manager
Finance Department*

**ADDENDUM TO BID
FIRE STATION 11 ROOF REPLACEMENT
BID: 612-F-073
ADDENDUM NO.: 2**

To: All Bidders:

Please adjust the bid opening date from July 17 to July 24, 2012. Time is unchanged.

The following clarifications are offered as a result of questions raised during the prebid meeting on 7/10/12:

- New curbs will be provided by the city, for existing HVAC unit to be flashed by roofing contractor
- Existing north wall obsolete gas pipes shall be cut by contractor flush with parapet wall prior to wall panel installation.
- Existing non-used antennas and lightning protection shall be removed and disposed of by contractor
- Existing core is: 2 Layers of 1 -1/2" Polyiso loose laid over metal deck
- To clarify Summary of Work, contractor to furnish and install an additional 1" Polyiso insulation, mechanically fastened to metal deck through existing insulation, per specifications.
- Contractor to furnish, fabricate, and install sheet metal around existing scuppers
- Site specific wall panel dimensions will be 12 -3/4" W x 32" H
- Any material needed which is not listed on the Garland product material list is the responsibility of the contractor and should be included in the base bid
- Contractor to furnish metal necessary for counter flashing
- Contractor to furnish and install 40 mil (min.) self-adhering underlayment to areas receiving the new metal coping and new metal wall panels.
- Contractor to furnish hat channels and fasteners necessary for wall panel assembly
 - Clips necessary for wall panel assembly can be found on Garland Material List
- RMER Coping System Includes:
 - Coping Face
 - Neoprene Block
 - Butyl Sealant
 - Splice Plate
 - Anchor Plate



Carrie Eklund
 Central Services Manager
 Finance Department

- Fasteners
- Clarification of Garland Material List as Follows:
 - **Stressply E** –Modified Membrane used for the flashing and field Finishing Ply, see specification for more information
 - **Silverflash** – Cold applied mastic application used for exposed flashing and similar work per specification
 - **Garmesh Roll** – Scrim used as reinforcement for 3 course silverflash application, see specification for more information
 - **Weatherscreen** - Cold applied flood coat , see specification for more information
 - **HPR Tribase Premium** – Base Flashing Ply, see specification for more information
 - **Pyramic** – Reflective coating used on all exposed flashings and similar work, see specification for more information.
 - **RMER Wall Panel** – Metal wall panels used for north section parapet wall (noted on facility drawing), see specification for more information
 - **RMER Coping** – Metal Coping system, see specification for more information.
 - **RMER Inside Miter** – Used for inside corners of coping installation, see details and specification for more information
 - **RMER Outside Miter** – Used for outside corners of coping installation, see details and specification for more information.
 - **RMER Wall Panel Clip** – Used for RMER Wall Panel assembly, see details and specification for more information.
 - **Metal Flat Stock**- Used for miscellaneous metal fabrication
 - Including, but not limited to, inside/ outside wall panel corner details and sill/head trim.
 - See specification and details for other metal necessary

Please refer to the attached drawings.

In addition, please replace the materials list provided in addendum 1 with the list below:

Product #	Product Name	Unit / Size	Coverage Rate	Quantity
4393	STRESSPLY E	ROLL	100 SQ. FT.	



Carrie Eklund
Central Services Manager
Finance Department

7425-5	SILVERFLASH	5 GAL	1 GAL/7	
4840-6	GARMESH ROLL	6" x 150'	75 SQ FT	
7342-5	WEATHERSCREEN	5 GAL	5 GAL/SQ.	
4121	HPR TRIBASE PREMIUM	ROLL	200 SQ FT	
7467-5	PYRAMIC (2 COATS)	5 GAL	1-1.5	
N/A	RMER WALL PANEL	12-3/4"WIDTH 32" HEIGHT	SQ. FT.	
N/A	RMER COPING (coping 120" With 2 – 16 GA Chairs & 6" Splice Plate)		L.F.	
N/A	RMER COPING INSIDE MITER		L.F.	
N/A	RMER COPING OUTSIDE MITER		L.F.	
N/A	FLAT STOCK	4' x 10'		
SSCLIPPANWAL	RMER WALL PANEL CLIP	PIECE		

All other portions remained unchanged.



A copy of this addendum or a reference thereto must be included with your bid or the bid will not be read or considered.

If you have any questions please contact the Central Services Division at (815) 987-5560.

DATED: July 12, 2012

FINANCE AND PERSONNEL COMMITTEE

Carrie Eklund
Central Services Manager

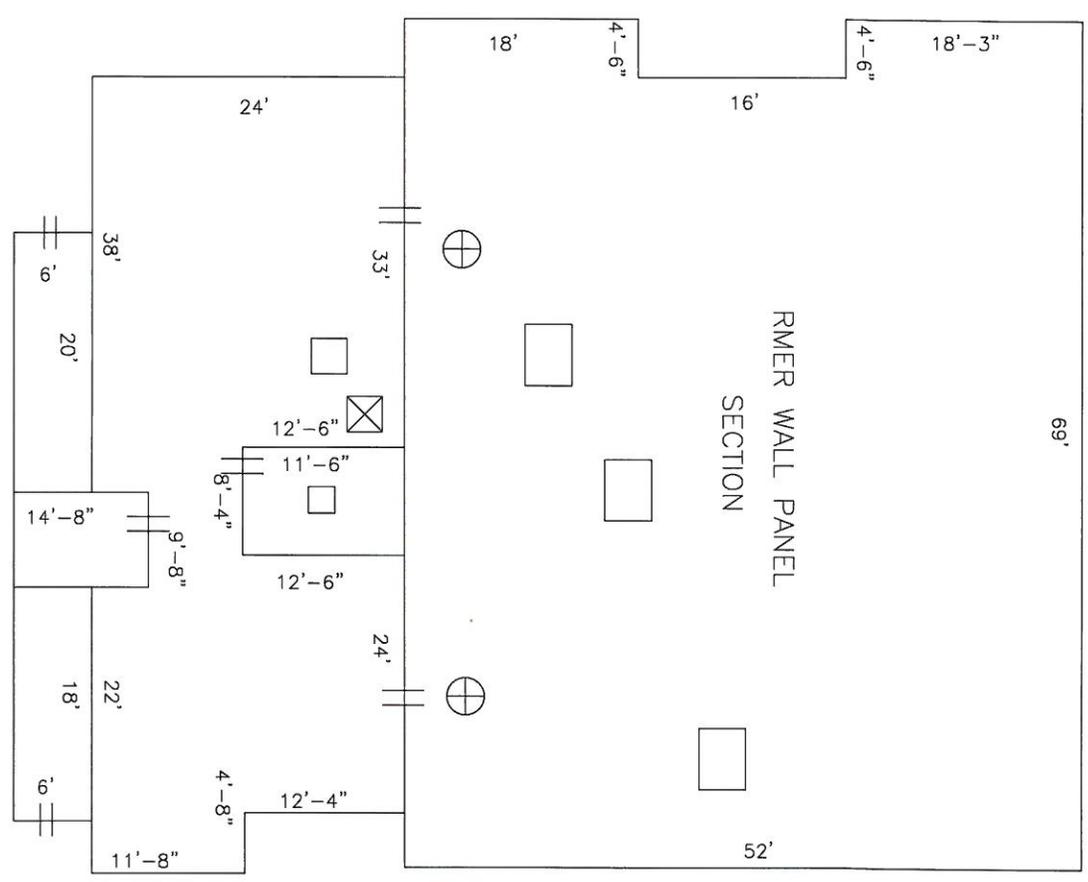


RMER WALL PANEL
SECTION

- LEGEND**
- ⊕ Roof Drain
 - Unit
 - || Scupper
 - ⊗ Skylight

REVISION		City of Rockford Rockford, IL	
SHEET 1 OF 1	DATE 4-1-2012	CUSTOMER Rockford Fire	JOB NUMBER
			DWG BY JM
			CHK BY



THE GARLAND COMPANY INC.
 3800 EAST 91st STREET - CLEVELAND, OHIO 44105-2197
 PHONE (800) 321-9336 / FAX (216) 641-0633

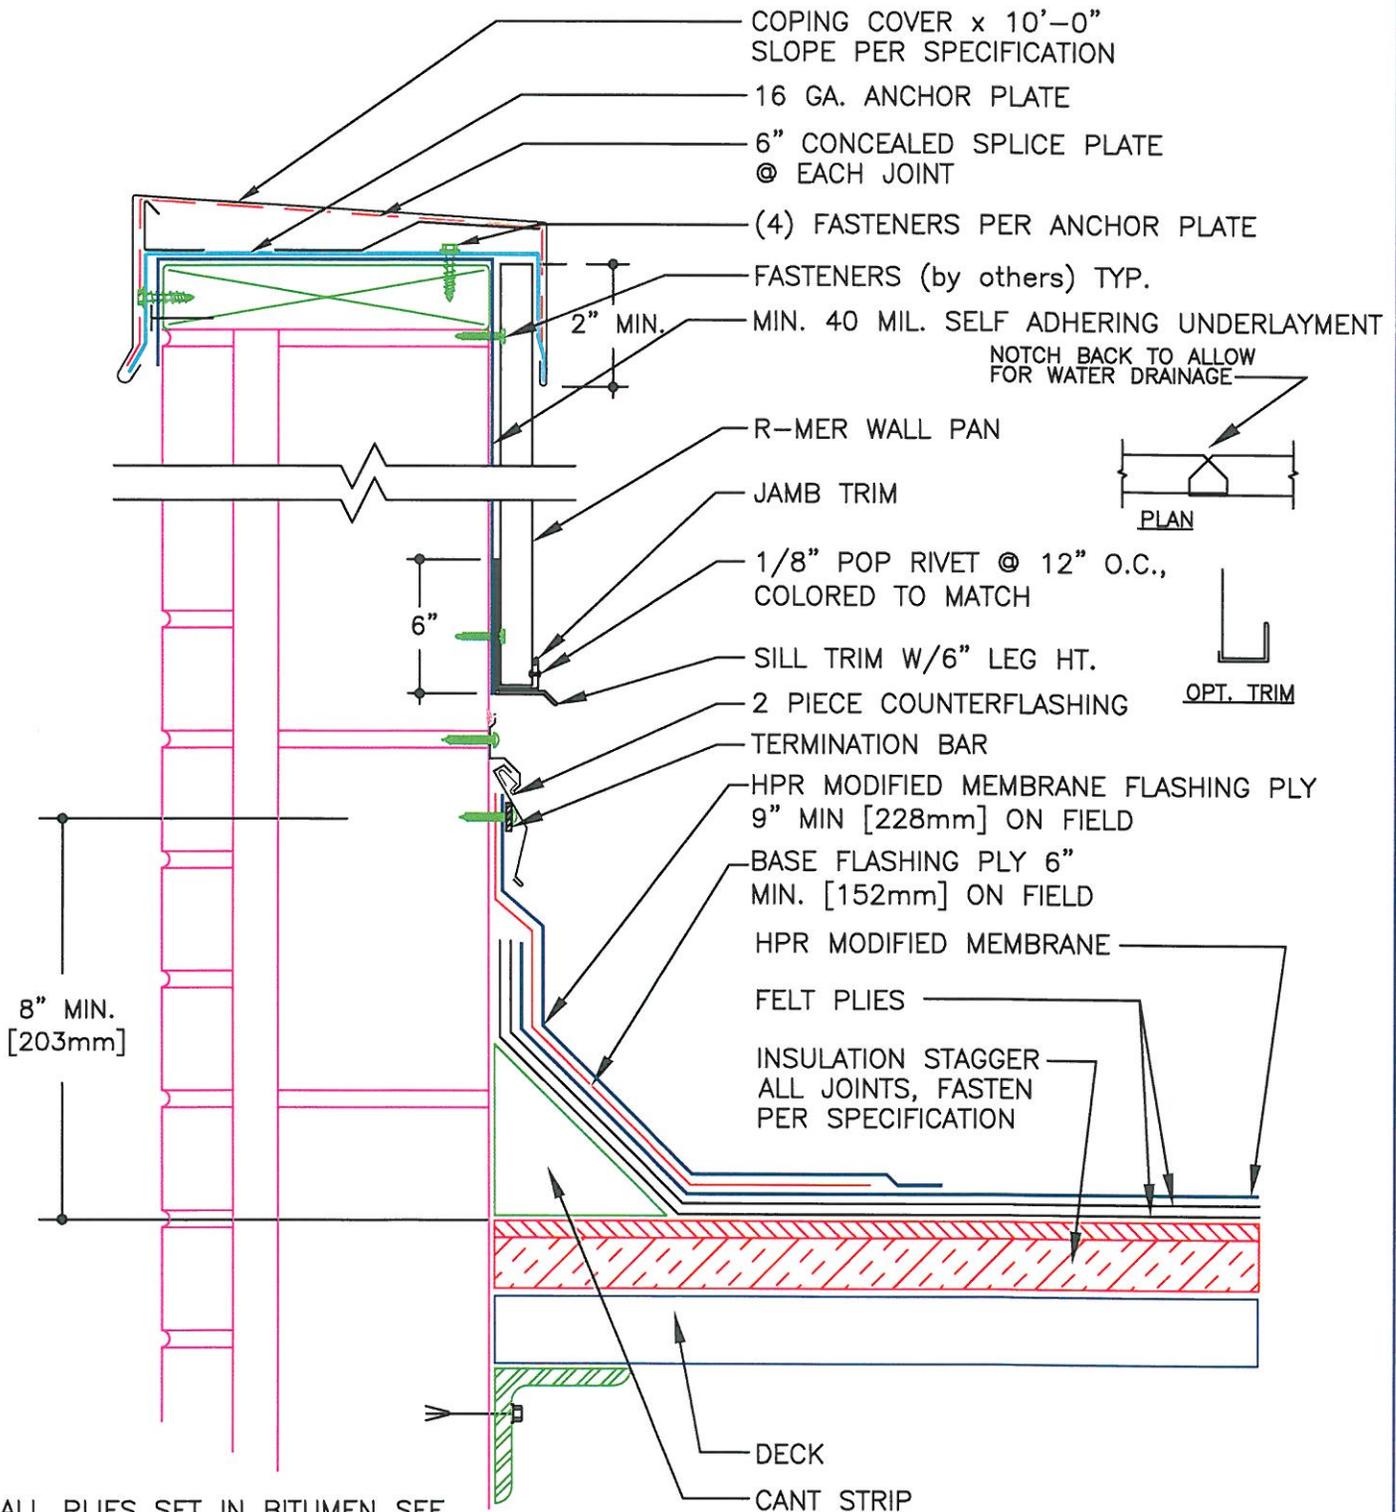

ALL PLYS SET IN BITUMEN SEE SPECIFICATIONS FOR SURFACING



THE GARLAND COMPANY, INC.
GARLAND CANADA, INC.
THE GARLAND COMPANY UK, LTD

DETAIL:

R-MER LINE WALL PANEL

GENERIC DECK