

# CITY OF ROCKFORD

## WINNEBAGO COUNTY, ILLINOIS

# DOWNTOWN WEST STATE STREETScape

### INDEX to DRAWINGS

SHEET NO.	TITLE
C1	COVER SHEET
C2	GENERAL NOTES
C3	TOPOGRAPHIC SURVEY - MAIN STREET
C4	TOPOGRAPHIC SURVEY - WYMAN STREET
C5	MAINTENANCE OF TRAFFIC - STAGE 1
C6	MAINTENANCE OF TRAFFIC - STAGE 2
C7	EROSION CONTROL PLAN
C8	DEMOLITION PLAN
C9	EXISTING VAULT CONDITIONS
C10	PROPOSED VAULT CONDITIONS
C11	TRAFFIC SIGNAL PLANS
C12	CITY OF ROCKFORD DETAILS
C13	RRWRD DETAILS
C14.1-14.4	ADA DETAILS
L1-L3	LANDSCAPE - SITE PLANS
L4	LANDSCAPE - SIGNAGE PLAN
L5-L6	LANDSCAPE - CONSTRUCTION DETAILS
L7	ALTERNATE BID - MODULAR PLANTER PLAN
E1-E4	ELECTRICAL - SITE PLANS
E5-E6	ELECTRICAL - DETAILS

### STATE STANDARDS

424001-07	PERPENDICULAR CURB RAMPS FOR SIDEWALK
701701-09	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701801-05	SIDEWALK, CORNER OR CROSSWALK CLOSURE
701901-03	TRAFFIC CONTROL DEVICES
878001-09	CONCRETE FOUNDATION DETAILS
880006-1	TRAFFIC SIGNAL MOUNTING DETAILS




SIMPLY CALL

811

OR


1-800-892-0123

illinois1call.com

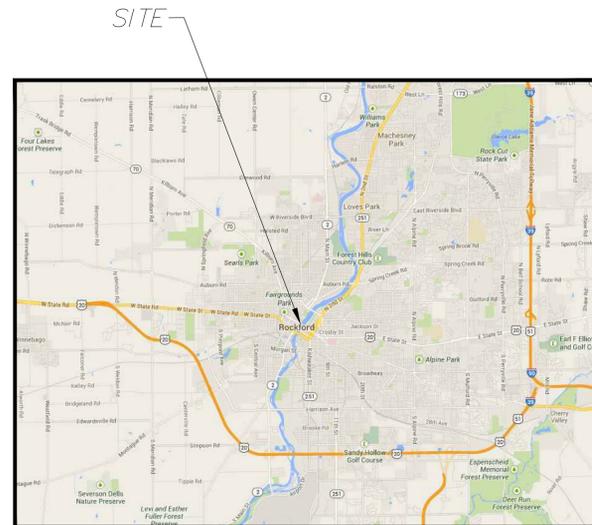

SITE VICINITY MAP

NOT TO SCALE

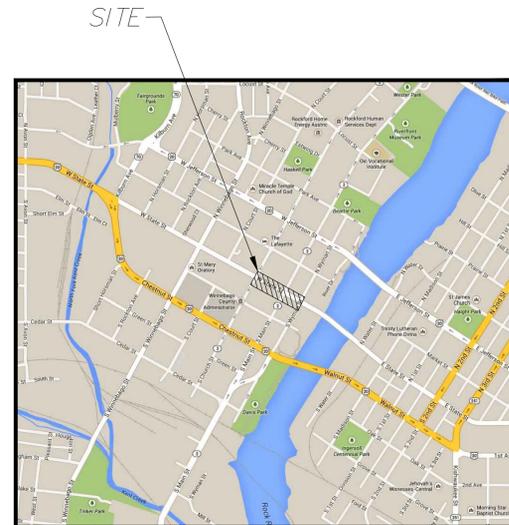

SITE LOCATION MAP

NOT TO SCALE

### UTILITIES:

#### GAS:

NICOR  
300 WEST TERRA COTTA AVENUE  
CRYSTAL LAKE, ILLINOIS 60014  
(630) 435-0111

#### ELECTRIC:

ComEd  
123 ENERGY AVENUE  
ROCKFORD, ILLINOIS 61109  
(815) 490-2869

#### TELEPHONE:

AT&T COMPANY  
216 NORTH MAIN STREET  
ROCKFORD, ILLINOIS 61101  
(800) 222-0400

VERIZON  
112 WEST ELM STREET  
SYCAMORE, ILLINOIS 60178  
(800) 256-4646

#### SEWER:

ROCK RIVER WATER RECLAMATION DISTRICT  
P.O. BOX 7480  
3501 KISHWAUKEE STREET  
ROCKFORD, ILLINOIS 61109  
(815) 387-7660

#### WATER:

CITY OF ROCKFORD - PUBLIC WORKS  
425 EAST STATE STREET  
ROCKFORD, ILLINOIS 61104  
(815) 987-5570

#### CABLE TELEVISION:

COMCAST  
800 21st STREET  
ROCKFORD, ILLINOIS 61101  
(815) 962-4400

#### HIGHWAY:

CITY OF ROCKFORD - PUBLIC WORKS  
425 EAST STATE STREET  
ROCKFORD, ILLINOIS 61104  
(815) 987-5570

Summary Of Quantities			
No.	Item	Units	Quant.
1	TRAFFIC CONTROL AND PROTECTION	L.SUM	1
2	INLET PROTECTION	EA	7
3	STREET SIGN - REMOVE, STORE, REINSTALL	EA	20
4	INSTALL SIGN POST	EA	15
5	TREE REMOVAL	EA	13
6	3" DIAMETER TREE	EA	16
7	TREE VAULT WITH FRAME AND GRATE	EA	16
8	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 2C	FOOT	338
9	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C	FOOT	176
10	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 5C	FOOT	176
11	TRAFFIC SIGNAL POST, GALVANIZED STEEL 14 FT.	EACH	1
12	PAINT NEW TRAFFIC SIGNAL POST	EACH	1
13	CONCRETE FOUNDATION, TYPE A	FOOT	3
14	SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 3-SECTION, BRACKET MOUNTED	EACH	1
15	PED. SIGNAL HEAD, POLYCARBONATE, LED, 2-FACE, BRACKET MOUNTED W/COUNT DOWN TIMER	EACH	1
16	PEDESTRIAN PUSH-BUTTON	EACH	2
17	REMOVE ELECTRIC CABLE FROM CONDUIT	FOOT	690
18	REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT	L.SUM	1
19	REMOVE EXISTING CONCRETE FOUNDATION	EACH	1
20	MODIFY EXISTING CONTROLLER	EACH	1
21	SIDEWALK REMOVAL	SQ FT	13,312
22	VAULT CEILING SLAB REPAIR (PARTIAL)	SQ FT	10
23	VAULT CEILING SLAB REPAIR (FULL DEPTH, TYPE I)	SQ FT	25
24	VAULT CEILING SLAB REPAIR (FULL DEPTH, TYPE II)	SQ FT	50
25	VAULT WATERPROOFING	SQ FT	1,985
26	PORTLAND CEMENT CONCRETE SIDEWALK - REINFORCED	SQ FT	3,598
27	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	7,749
28	STAMPED COLORED PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	1,555
29	ADA CURB RAMP, DETECTABLE WARNING	SQ FT	127
30	COMBINATION CURB AND GUTTER REMOVAL	FOOT	135
31	COMBINATION CONCRETE CURB AND GUTTER, TYPE M-6.18 (MODIFIED)	FOOT	135
32	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	3
33	CONCRETE DRIVEWAY REMOVAL	SY	104
34	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 INCH	SY	104
35	WATER SERVICE CURB STOP TO BE ADJUSTED	EA	3
36	MANHOLES TO BE ADJUSTED	EA	3
37	MANHOLES TO BE ADJUSTED (SANITARY)	EA	1
38	PAVEMENT MARKING REMOVAL	SQ FT	308
39	TEMPORARY PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	22
40	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	374
41	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	33
42	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	375
43	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	50
44	TRASH RECEPTACLE	EA	4
45	REMOVAL OF LIGHTING UNIT, SALVAGE	EA	14
46	REMOVAL OF POLE FOUNDATION	EA	14
47	REMOVE EXISTING HANDHOLE	EA	5
48	HANDHOLE TO BE ADJUSTED	EA	14
49	UNDERGROUND CONDUIT, COILABLE NONMETALLIC CONDUIT, 2" DIA	FOOT	1,450
50	ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 10	FOOT	610
51	ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 6	FOOT	2,970
52	ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 2	FOOT	990
53	LIGHT POLE FOUNDATION, 24" DIAMETER	FOOT	140
54	LIGHT POLE, SPECIAL	EA	14
55	HANDHOLE, COMPOSITE CONCRETE	EA	2
56	LUMINAIRE, LED, HORIZONTAL MOUNT, 66 WATT	EA	14
57	ELECTRIC CABLE IN CONDUIT, TRACER, NO. 12 1C	FOOT	1,450
58	DIRECTIONAL BORING	FOOT	160
59	MAINTENANCE OF LIGHTING SYSTEM	LS	1
60	ALTERNATE BID / CONCRETE MODULAR PLANTER	EA	14
61	ALTERNATE BID / MODULAR PLANTER PLANTING MATERIAL	EA	14
62	LIGHT POLE BASKET PLANTINGS	EA	28

### OUT FOR BID

AGENCY RESPONSIBLE FOR LETTING

APPROVED: \_\_\_\_\_

CITY OF ROCKFORD

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Illinois.

Signature: \_\_\_\_\_  
Walter Koch, P.E.

Date: \_\_\_\_\_ Reg No.: 062-060374  
(Month, Day, Year)

My registration renewal date is November 30, 2015

SHEETS C1-C9, C11-C14

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly Licensed Structural Engineer under the laws of the State of Illinois.

Signature: \_\_\_\_\_  
Ali A. Gharamli, P.E.

Date: \_\_\_\_\_ Reg No.: 081-005060  
(Month, Day, Year)

My registration renewal date is November 30, 2016

SHEET C10

1:1	2/26/2015	WJK	JMY
NO.	DATE	CHECKED BY:	SUBMITTAL DATE:
1	02/26/2015	JMY	02/13/2015

REVISIONS	ITEM	DATE
NO.	ADDDENDUM NO. 1	

COVER SHEET  
DOWNTOWN WEST STATE STREETScape  
WEST STATE STREET  
ROCKFORD, ILLINOIS  
FILE: I:\13-018 WEST STATE STREETScape\DESIGN\DRAWINGS\13-018 COVER.DWG  
JOB 04-04-13-018-018



SHEET NO.  
C1  
OF  
17