



Carrie Eklund
Central Services Manager
Finance Department

**ADDENDUM TO BID
W. State St. Corridor Demolitions – Package B 2011
Bid No.: 811-PW-091
Addendum No.: 1**

To: All Bidders:

Please make the following changes to the above mentioned bid package. All other portions remained unchanged.

1. **Commercial Buildings Open for Voluntary Inspections:**

Representatives from the City will provide access to the commercial structures on **Friday, October 7, 2011 from 8:00 am until 11:00 am**. Bidders shall carefully examine the project site(s) to eliminate misconceptions, verify dimensions, elevation, working conditions, transportation and storage facilities. Bidders shall give due consideration to same in preparing their proposals as no exceptions will be considered after awarding the contract; nor will the contractor be entitled to any extra compensation for his/her failure to verify conditions at the site. **Bidders are not required to attend.**

Properties available for access: 1053, 1055, 1057, 1059 & 1719 W. State Street.

2. **Tree Protection Detail:**

Please find attached a detail for **Tree Protection – Fencing (Standard Drawing No. IL-690)** to be used for all trees designated on the Site Maps to be protected. As referenced in Section 3.4.4 Vegetation on page 34 of 182 of the bid documents.

A copy of this addendum or a reference thereto must be included with your bid or the bid will not be read or considered.


If you have any questions please contact the Central Services Division at (815) 987-5560.

DATED: October 4, 2011


FINANCE AND PERSONNEL COMMITTEE

Carrie Eklund
Central Services Manager

TREE PROTECTION - FENCING

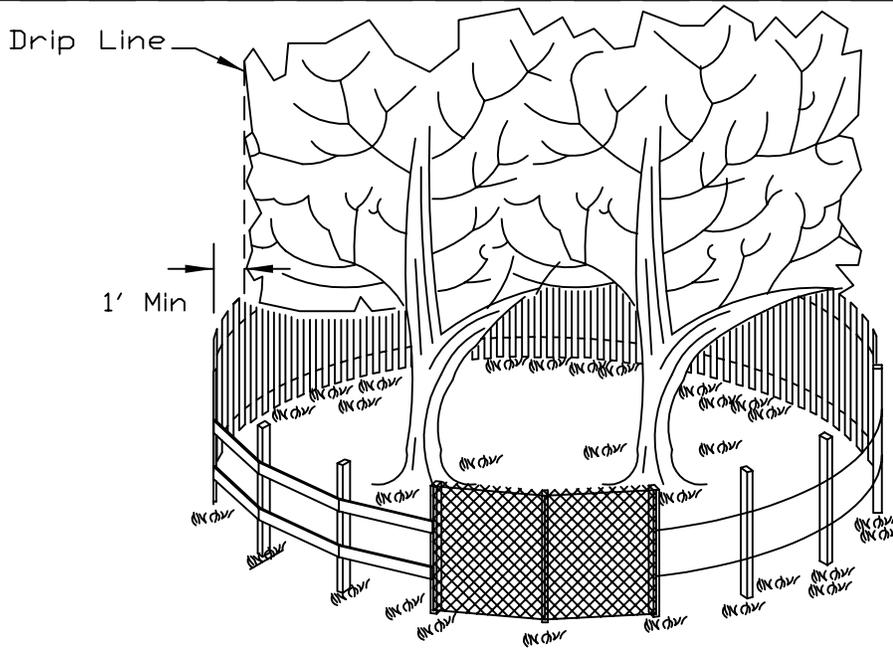

SIDE VIEW

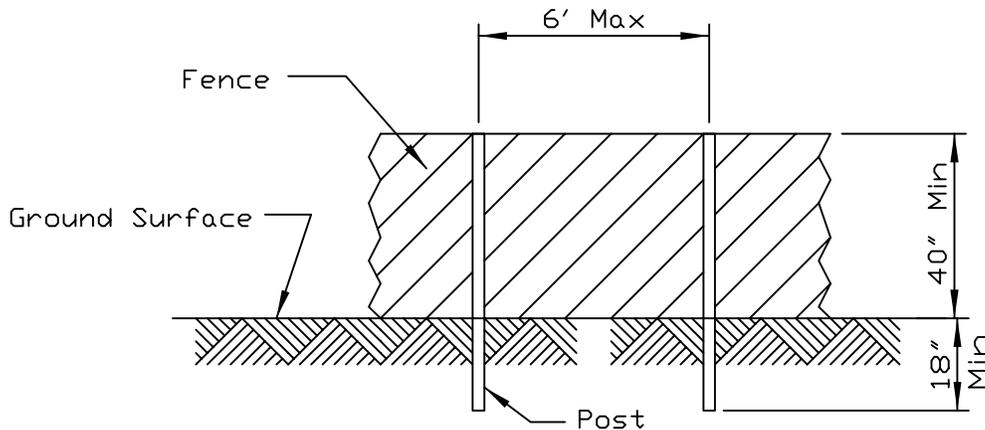

POST AND FENCE DETAIL

NOTES:

1. The fence shall be located a minimum of 1 foot outside the drip line of the tree to be saved and in no case closer than 5 feet to the trunk of any tree.
2. Fence posts shall be either standard steel posts or wood posts with a minimum cross sectional area of 3.0 sq. in.
3. The fence may be either 40" high snow fence, 40" plastic web fencing or any other material as approved by the engineer/inspector.

REFERENCE	
Project	_____
Designed	_____ Date _____
Checked	_____ Date _____
Approved	_____ Date _____



NRCS

Natural Resources Conservation Service

STANDARD DWG. NO.
IL-690
SHEET 1 OF 1
DATE 4-7-94